

# Adaptive Time-Stepping Algorithms for Molecular Beam Epitaxy: Based on Energy or Roughness

Fusheng Luo\*, Hehu Xie<sup>†</sup>, Manting Xie<sup>‡</sup> and Fei Xu<sup>§</sup>

## Abstract

Due to the small parameter, high order derivatives and nonlinear term, it takes a long time to reach the steady state in the simulation of the molecular beam epitaxy (MBE) model. In this work, based on the numerical scheme in [6] and the good properties it holds, we introduce two types of adaptive time-stepping method, in which the physical quantities like energy or roughness are involved to produce time steps. Similarly to the spatial adaptive method, we take equidistribution of the physical quantities in time direction to control the simulation error. The numerical experiment shows that the computational time is significantly saved by these methods.

**Keywords.** Molecular beam epitaxy, adaptive time-stepping method, equidistribution of energy, equidistribution of roughness

**AMS subject classifications.** 35G31, 35Q99, 35R99, 65M06, 65M12.

## 1 Introduction

The dynamics of molecular beam epitaxy (MBE) growth has been widely concerned recently. In this work, we consider the continuum model for the evolution of MBE growth. The governing partial differential equation is:

$$\begin{cases} \frac{\partial \phi}{\partial t} = -\varepsilon \Delta^2 \phi - \nabla \cdot [(1 - |\nabla \phi|^2) \nabla \phi] & \text{in } \Omega \times (0, T), \\ \phi(\mathbf{x}, 0) = \phi_0(\mathbf{x}) & \text{in } \Omega, \end{cases} \quad (1.1)$$

where  $\Omega := [0, L]^2$ .  $\phi$  is a periodic height function and  $\varepsilon$  is a constant. The equation of MBE is the gradient flow associated with the following energy functional

$$E(\phi) = \int_{\Omega} \left( \frac{1}{4} (1 - |\nabla \phi|^2)^2 + \frac{\varepsilon^2}{2} |\Delta \phi|^2 \right) d\mathbf{x}, \quad (1.2)$$

where the nonlinear second-order term models the Ehrlich-Schwoebel effect, which leads to a preference of the structures with slope  $|\nabla \phi| = 1$ , and the fourth-order term represents the surface diffusion effect.

There have been extensive works for the MBE model. On the finite difference method, approaches based on convex splitting can be found in [7, 11], where the unconditional energy stability is given. In [6, 12] some implicit-explicit methods are introduced to deal with the problem. On the finite element method, [5] introduces a mixed finite element method combining the Crank-Nicolson (CN) scheme, and get optimal order in space and time. [2] applied Local discontinuous Galerkin method to the problem. [8] proposes a scalar auxiliary variable (SAV) for gradient flows. For more details, please see [9].

How to reduce the computational time in simulating the long term behavior is also widely considered. In [6], an adaptive time-stepping technique is developed based on the energy derivative

---

\*Third Institute of Oceanography, Ministry of Natural Resources, Xiamen 361005, China (luofusheng@tio.org.cn).

<sup>†</sup>LSEC, NCMIS, Institute of Computational Mathematics, Academy of Mathematics and Systems Science, Chinese Academy of Sciences, Beijing 100190, China, and School of Mathematical Sciences, University of Chinese Academy of Sciences, Beijing, 100049, China (hxie@lsec.cc.ac.cn)

<sup>‡</sup>Center for Applied Mathematics, Tianjin University, Tianjin 300072, China (mtxie@tju.edu.cn)

<sup>§</sup>Beijing Institute for Scientific and Engineering Computing, College of Applied Sciences, Beijing University of Technology, Beijing 100124, China (xufei@lsec.cc.ac.cn)

in time and was also used in [13] for the Cahn-Hilliard problem. In [12], based on the stabilization method there, the large time step is allowed in computation. [10] proposed the spectral deferred correction methods, and [1] applied this method the phase field problems. In this work, we mainly focus on finding some new adaptive time-stepping methods to shorten the simulation time. Based on the second order CN scheme, we first proposed an *adaptive time-stepping method: based on the energy* (**ATSBE**) similar to that in [4]. Then we also proposed a new type of *adaptive time-stepping method: based on the roughness* (**ATSBR**). With the help of the two methods, we proposed the adaptive time-stepping algorithm for the MBE problem and use the numerical example to illustrate the algorithm.

## 2 Difference scheme and some properties

In this section, we briefly introduce some properties of the equation and also the difference scheme for the completeness of the paper because the focus of the paper is on the time step variance. You can find more details in [6].

Define  $\|\cdot\|$  as the standard  $L^2$  norm in  $\Omega$ , and  $\|\cdot\|_{L^p}$  as the  $L^p$  norm. First, we list some known results for the continuum MBE model about the mass conservation, energy decay and stability.

**Lemma 2.1.** (*mass conservation*) *The solution  $\phi$  of MBE problem (1.1) is of mass conservation:*

$$\frac{d}{dt} \int_{\Omega} \phi(\mathbf{x}, t) d\mathbf{x} = 0. \quad (2.1)$$

*Proof.* Integral the first equation of (1.1) with respect to spatial variables, and apply the period boundary condition and Gauss-Green Formula. We prove the result.  $\square$

**Lemma 2.2.** (*energy identities* [3]) *For the solution  $\phi$  of MBE problem (1.1), the following energy identities hold:*

$$\frac{d}{dt} \|\phi\|^2 + 4E(\phi) + \|\nabla\phi\|_{L^4}^4 = |\Omega|, \quad (2.2)$$

$$\frac{d}{dt} E(\phi) + \|\phi_t\|^2 = 0. \quad (2.3)$$

**Lemma 2.3.** ( *$L^2$  stability* [6]) *The solution  $\phi(\mathbf{x}, t)$  is  $L^2$  stable under the sense that*

$$\|\phi(\cdot, t)\|^2 \leq e^{t/2\epsilon} \|\phi(\cdot, 0)\|^2. \quad (2.4)$$

Then, we use the CN scheme proposed in [6] to discretize the continuum MBE model. The CN scheme enjoys properties including energy decay, unconditional stability and second order accuracy in both time and space dimension.

Suppose a square domain  $\Omega$  is divided uniformly with size  $\Delta x = L/N_x$  and  $\Delta y = L/N_y$ , where  $L$  is side length of the square and  $N_x, N_y$  are the integers used to divide the sides. The set of the grid points is  $\Omega_h = \{(x_i, y_j), x_i = i\Delta x, y_j = j\Delta y\}$ . In time direction,  $\Delta t$  is used to denote the time steps. The discrete difference operator is defined for any function  $f$  as  $\nabla_h f_{i+\frac{1}{2}, j+\frac{1}{2}} = (\frac{f_{i+1, j} - f_{i, j}}{\Delta x}, \frac{f_{i, j+1} - f_{i, j}}{\Delta y})^T$ ,  $\Delta_h f_{i, j} = \frac{f_{i+1, j} + f_{i-1, j} - 2f_{i, j}}{(\Delta x)^2} + \frac{f_{i, j+1} + f_{i, j-1} - 2f_{i, j}}{(\Delta y)^2}$ , where  $f_{i, j} = f(x_i, y_j)$ . The second order CN scheme for MBE model (1.1) is

$$\frac{\phi_{i, j}^{n+1} - \phi_{i, j}^n}{\Delta t} = -\mu_{i, j}^{n+\frac{1}{2}}, \quad (2.5)$$

where

$$\mu_{i, j}^{n+\frac{1}{2}} = (\epsilon\Delta_h^2 + \Delta_h) \frac{\phi_{i, j}^{n+1} + \phi_{i, j}^n}{2} - \nabla_h \cdot \left( \frac{|\nabla_h \phi_{i, j}^{n+1}|^2 + |\nabla_h \phi_{i, j}^n|^2}{2} \frac{\nabla_h(\phi_{i, j}^{n+1} + \phi_{i, j}^n)}{2} \right). \quad (2.6)$$

The discrete  $L^2$  inner product and  $L^2$  norm for the grid function  $f, g$  are defined as  $(f, g)_h = \sum_{i=1}^{N_x} \sum_{j=1}^{N_y} f_{i, j} g_{i, j} \Delta x \Delta y$ ,  $\|f\|_h^2 = (f, f)_h$ , and the discrete  $H^1$  norm is  $\|f\|_{H^1, h} = [\sum_{i=1}^{N_x} \sum_{j=1}^{N_y} (|f_{i, j}|^2 + |\nabla_h f_{i-\frac{1}{2}, j-\frac{1}{2}}|^2) \Delta x \Delta y]$ .

The CN scheme preserves a discrete version of the properties held by the continuum model. These properties are important ingredients for the adaptive time-stepping algorithms.

**Lemma 2.4.** (Mass conservation) For any solution of (2.5), the discrete form of mass conservation holds

$$\sum_{i=1}^{N_x} \sum_{j=1}^{N_y} \phi_{i,j}^s \Delta x \Delta y = \sum_{i=1}^{N_x} \sum_{j=1}^{N_y} \phi_{i,j}^t \Delta x \Delta y, \quad \forall s, t. \quad (2.7)$$

*Proof.* Multiply  $\Delta x \Delta y \Delta t$  on both side of (2.5), and sum on all of the spatial grid, we have the left hand side

$$\sum_{i=1}^{N_x} \sum_{j=1}^{N_y} \Delta x \Delta y \Delta t \frac{\phi_{i,j}^{n+1} - \phi_{i,j}^n}{\Delta t} = \sum_{i=1}^{N_x} \sum_{j=1}^{N_y} \phi_{i,j}^{n+1} \Delta x \Delta y - \sum_{i=1}^{N_x} \sum_{j=1}^{N_y} \phi_{i,j}^n \Delta x \Delta y.$$

By the definition of the discrete operator  $\nabla_h$  and  $\Delta_h$  and the periodic boundary condition, the right-hand side equals to zero. So the conclusion holds for two consecutive steps and thus for any two solutions.  $\square$

**Lemma 2.5.** (Equality between two steps [6]) Let  $\phi^n$  and  $\phi^{n+1}$  be two consecutive numerical solutions of (2.5) and define  $\phi^{n+\frac{1}{2}} := \frac{\phi^n + \phi^{n+1}}{2}$ , then we have

$$\begin{aligned} & \frac{\|\phi^{n+1}\|_h^2 - \|\phi^n\|_h^2}{\Delta t} = \\ & - \left( 2\epsilon \|\Delta_h \phi^{n+\frac{1}{2}}\|_h^2 + \left( \frac{|\nabla_h \phi^n|^2 + |\nabla_h \phi^{n+1}|^2}{2}, |\nabla_h \phi^{n+\frac{1}{2}}|^2 \right) - 2\|\nabla_h \phi^{n+\frac{1}{2}}\|_h^2 \right). \end{aligned} \quad (2.8)$$

Moreover, we have  $\|\phi^n\|_h^2 \leq C_1 \|\phi^0\|_h^2$ , with condition  $\Delta t \leq 4\epsilon$ , where  $C_1$  is independent of  $h$  and  $\Delta t$ , but depends on  $1/\epsilon$ .

Define the discrete energy functional of (1.2) as

$$E_h(\cdot) = \frac{1}{4} \|1 - |\nabla_h \cdot|^2\|_h^2 + \frac{\epsilon^2}{2} \|\Delta_h \cdot\|_h^2. \quad (2.9)$$

**Lemma 2.6.** (Energy stability [6]) The scheme (2.5) is unconditionally energy stable, which means for any time step  $\Delta t$ , it holds  $E_h(\phi^{n+1}) \leq E_h(\phi^n)$ . More precisely, a similar energy identity as (2.3) holds

$$\frac{E_h(\phi^{n+1}) - E_h(\phi^n)}{\Delta t} = -\|\mu^{n+\frac{1}{2}}\|_h^2, \quad (2.10)$$

where  $\mu^{n+\frac{1}{2}}$  is defined in (2.6).

### 3 Adaptive time-stepping algorithms

We introduce two types of adaptive time-stepping method in this section. First, there are two ways to build the adaptive time step. Then with some uniform notation, we proposed the adaptive time-stepping algorithms.

#### (a) An adaptive time step: based on energy (ATSBE)

We follow the method in [4] for the Cahn-Hilliard equation to use the energy decay to control the variance of the time steps. A transform of discrete energy identity (2.10) is  $\Delta t = -\frac{E_h(\phi^{n+1}) - E_h(\phi^n)}{\|\mu^{n+\frac{1}{2}}\|_h^2}$ .

As we aim at equidistribution of the energy decrease, let the numerator  $|E_h(\phi^{n+1}) - E_h(\phi^n)|$  be a constant  $\delta E$ . Then it turns to  $\Delta t = \frac{\delta E}{\|\mu^{n+\frac{1}{2}}\|_h^2}$ . There is still an unknown term  $\phi_h^{n+\frac{1}{2}}$  in the denominator. We replace  $\phi_h^{n+1}$  by  $\phi_h^n$  in (2.6) to denote  $\mu^n$  and get a computable adaptive time step  $\delta t$

$$\delta t = \frac{\delta E}{\|\mu^n\|_h^2}. \quad (3.1)$$

#### (b) An adaptive time step: based on roughness (ATSBR)

The roughness changes according to the phase changes, and it is bounded by initial data. Thus, it is reasonable to consider using it to produce time steps.

The roughness, noted as  $M(t)$ , for the height function at  $t$  is defined as

$$M(t) = \sqrt{\frac{1}{|\Omega|} \int_{\Omega} (\phi(\mathbf{x}, t) - \bar{\phi}(t))^2 d\mathbf{x}}, \text{ where } \bar{\phi}(t) = \frac{1}{|\Omega|} \int_{\Omega} \phi(\mathbf{x}, t) d\mathbf{x}.$$

Since we have conservation law in both continuous form (2.1) and discrete form (2.7), and when the initial value is chosen to satisfied the  $\bar{\phi}(t) = 0$ , we have  $|\Omega|M(t)^2 = \|\phi\|^2$  and the identity (2.8) can be viewed as the relationship between roughness and time steps.

From the discrete identity (2.8), with a slight transformation, it turns to

$$\Delta t = -\frac{\|\phi^{n+1}\|_h^2 - \|\phi^n\|_h^2}{\nu^{n+\frac{1}{2}}}, \quad (3.2)$$

where

$$\nu^{n+\frac{1}{2}} = \left( 2\epsilon \|\Delta_h \phi^{n+\frac{1}{2}}\|_h^2 + (|\nabla_h \phi^n|^2 + |\nabla_h \phi^{n+1}|^2, |\nabla_h \phi^{n+\frac{1}{2}}|^2) - 2\|\nabla_h \phi^{n+\frac{1}{2}}\|_h^2 \right). \quad (3.3)$$

Since the roughness is concerned here, we set a constant change constraint on  $\|\phi\|_h^2$  by  $\delta M = \|\phi^{n+1}\|_h^2 - \|\phi^n\|_h^2$ , and replace the unknown term  $\phi_h^{n+1}$  in (3.3) with  $\phi_h^n$  to denote  $\nu^n$  and form a second computable adaptive time step

$$\delta t = \frac{\delta M}{|\nu^n|} \quad (3.4)$$

where the absolute value is taken since the time step should be positive.

Based on the discussion, an adaptive time stepping algorithm on equidistribution of the energy decay or the roughness change is proposed as below. For the convenience, we use a triple  $(W, \delta W, \gamma)$  in the algorithm defined as  $(W, \delta W, \gamma) := (E, \delta E, \mu)$  or  $(M, \delta M, \nu)$ .

**Algorithm 3.1.** (*adaptive time-stepping algorithm*)

1. Set  $\Delta t_{min}$  and  $\Delta t_{max}$ , compute the problem (2.5) with the minimal time step  $\Delta t_{min}$  for some step. Set  $\delta W$  as the average of the energy decay or the roughness change, and set  $m, n = 1$ .

2. At the time  $t_n$ , compute the time step with formula

$$\delta t = \frac{\delta W}{|\gamma^n|},$$

and compute the problem (2.5) with time step  $\Delta t = \min(\Delta t_{max}, \max(\delta t, \Delta t_{min}))$ .

3. Check if energy decay or the roughness change between two step  $\leq \delta W$  and  $\Delta t = t_{min}$ . If neither, return to 2 with time step  $\Delta t = \min(t_{max}, \max(\frac{\Delta t}{2}, \Delta t_{min}))$ .

4. If  $\Delta t = \Delta t_{min}$ , adjust  $\delta M$  with an arithmetic average

$$\delta W = \frac{m \times \delta W + \text{energy decay or the roughness change}}{m + 1} \quad (3.5)$$

and set  $m := m + 1$ .

5. Set  $t_{n+1} = t_n + \Delta t$ , set  $n := n + 1$  and go to 2.

**Remark 3.1.** The time step in **ATSBE** or **ATSBR** could have a similarly accurate mechanism to adjust result  $\delta t$ . When the phase changes fast which means the energy or the roughness changes fast, the methods can produce small time steps. When the phase change slows down, time steps turn to bigger.

**Remark 3.2.** It is noted that in roughness based adaptive method (3.4), only the first and second order derivatives are involved, compared to the higher order derivatives in the energy based one (3.1).

**Remark 3.3.** In the adaptive time-stepping strategy Algorithm 3.1, we get rid of the artificial choice of the parameters, except the  $\Delta t_{min}, \Delta t_{max}$ .

## 4 Numerical experiments

In this section, we implement two adaptive time-stepping methods for the MBE problem. The constant time steps are used to compute a comparable solution. The Newton iteration method is used to solve the nonlinear discrete system, and multigrid solver is used to solve the linear system arise at each Newton iterative step. The tolerances for the Newton iteration method and for the multigrid method are set to be  $10^{-9}$ .

**Example** Consider the two-dimensional isotropic symmetry current model,

$$\begin{cases} \frac{\partial \phi}{\partial t} = -\varepsilon \Delta^2 \phi - \nabla \cdot [(1 - |\nabla \phi|^2) \nabla \phi] & \text{in } [0, 2\pi]^2 \times (0, T), \\ \phi(\mathbf{x}, 0) = \phi_0(\mathbf{x}) & \text{in } [0, 2\pi]^2, \end{cases} \quad (4.1)$$

with periodic boundary condition and parameter  $\varepsilon = 0.1$ . The initial condition is  $\phi_0(x) = 0.1(\sin 3x \sin 2y + \sin 5x \sin 5y)$  and  $T = 30$ .

This example is used in [3, 6, 12] to study the stability, energy decay, roughness evolution and adaptive time stepping. Here we also do detailed research on this problem to show the usability of our algorithm. Since the true solution is unknown, a numerical result obtained on a  $200 \times 200$  grid and with a uniform time step  $\delta t = 0.0001$  is served as the "true solution". For two adaptive time stepping methods, we use the average energy decay in the time interval  $[0.05, 0.1]$  as  $\delta M$  and set  $\Delta t_{\min} = 0.0001$ .

### The comparison of the phase pictures.

Some phase pictures on special timelines are shown in Figure 1. The upper three are with uniform step(  $\Delta t = 0.0001$  ), the middle three are with **ATSBE** and the lower three are with **ATSBR** (both adaptive method are with  $\Delta t_{\min} = 0.0001, \Delta t_{\max} = 0.1$ ). From the pictures, we can see on every timeline the three look almost the same.

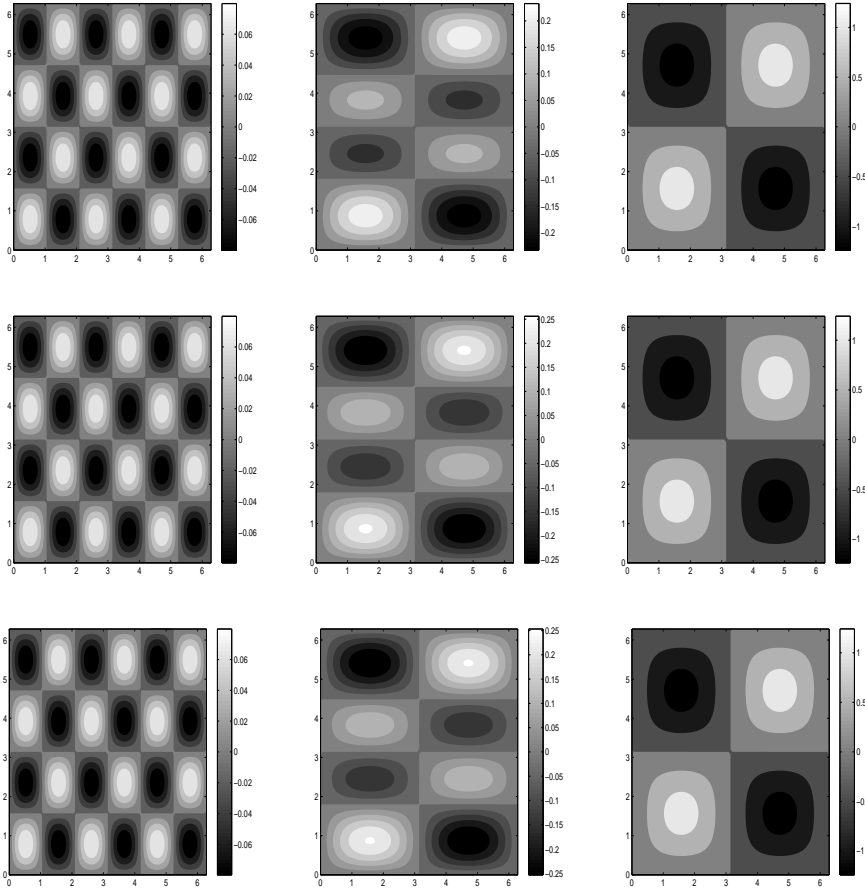


Figure 1: Contour plots of height profiles: left to right,  $t = 0.05s, t = 5.5s, t = 30s$ ; upper: with uniform  $\Delta t$ , middle: with **ATSBE**, bottom: with **ATSBR**

**The evolution of  $M$  and the corresponding  $\Delta t$ .** In order to show the sensitive of the adaptive method, we fix the  $\Delta t_{\min} = 0.0001$ , but use different  $\Delta t_{\max} = 0.1, 0.2$  and  $0.5$ . The Figure 2 shows the evolution of energy  $E$ , and the corresponding  $\Delta t$  of **ATSBE**, and the Figure 3 shows that of roughness  $M$ , and the corresponding  $\Delta t$  of **ATSBR**.

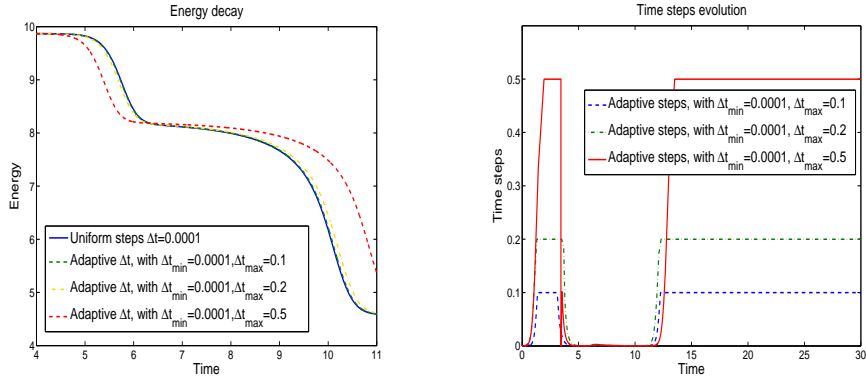


Figure 2: **ATSBE**. Left: the energy evolution; Right: the  $\Delta t$

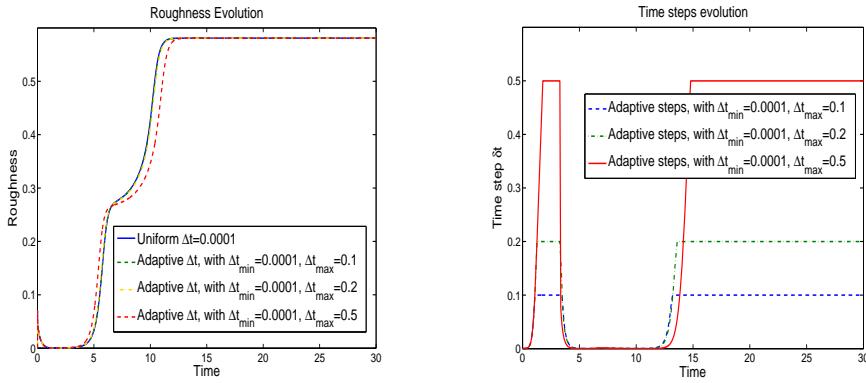


Figure 3: **ATSBR**. Left: the roughness evolution; Right: the  $\Delta t$

**The computational time.** Finally, the CPU time is showed in Figure 4, from which we can find both adaptive methods do actually save computational time and only take 1/3 to 1/2 of the time of the uniform method.

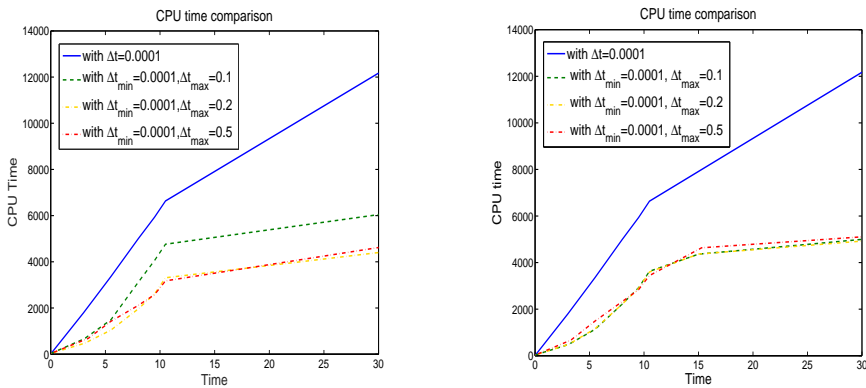


Figure 4: The CPU time. Left: **ATSBE**; right: **ATSBR**

## 5 Acknowledgments

The work of the first author was partially supported by National Nature Science Foundation of China (Grant Nos. 11401129, 11871410) . The work of the second author was partially supported by the National Nature Science Foundation of China (Grant Nos. 11771434, 91730302) and the National Center for Mathematics and Interdisciplinary Science, CAS. The work of the forth author was partially supported by the National Nature Science Foundation of China (Grant No. 11801021). At the same time, the authors gratefully acknowledge the referees for their great efforts and valuable suggestions on our manuscript.

## References

- [1] X. Feng, T. Tang, and J. Yang, Long time numerical simulations for phase-field problems using p-adaptive spectral deferred correction methods. *SIAM J. Sci. Comput.* 37(1) (2015), pp. 271–294.
- [2] R. Guo and Y. Xu. Local discontinuous Galerkin method and high order semi-implicit scheme for the phase field crystal equation. *SIAM J. Sci. Comput.* 38(1) (2016), pp. 105–127.
- [3] B. Li and J. Liu, Thin film epitaxy with or without slope selection, *European J. Appl. Math.*, 14 (2003), pp. 713–743.
- [4] F. Luo, T. Tang, and H. Xie, Parameter-free time adaptivity based on energy evolution for the Cahn-Hilliard equation. *Communications in Computational Physics*, 19(5) (2016), pp. 1542–1563.
- [5] Z. Qiao, T. Tang and H. Xie, Error analysis of a mixed finite element method for the molecular beam epitaxy model with a Crank-Nicolson time-stepping. *SIAM J. Numerical Analysis*, 53 (2015), pp. 184–205.
- [6] Z. Qiao, T. Tang and Z. Zhang, An adaptive time stepping strategy for the molecular beam epitaxy models, *SIAM J. Sci. Comput.*, 33(3) (2011), pp. 1395–1414.
- [7] J. Shen, C. Wang, X. Wang and S. Wise, Second-order convex splitting schemes for gradient flows with Ehrlich-Schwoebel type energy: application to thin film epitaxy, *SIAM J. Numer. Anal.*, 50 (2012), pp. 105–125.
- [8] J. Shen, J. Xu and J. Yang, The scalar auxiliary variable (SAV) approach for gradient flows, *J. Comput. Phys.*, 353 (2018), pp. 407–416.
- [9] T. Tang, On effective numerical methods for phase field models, *Pro. Int. Cong. of Math.*, 3 (2018), pp. 3653–3676.
- [10] T. Tang, H. Xie, and X. Yin, High-order convergence of spectral deferred correction methods on general quadrature nodes. *J. Sci. Comput.* 5(1) (2013), pp. 1–13.
- [11] C. Wang, X. Wang and S. Wise, Unconditionally stable schemes for equations of thin film epitaxy, *Disc. Contin. Dyn. Sys. Ser. A*, 28 (2010), pp. 405–423.
- [12] C. Xu and T. Tang, Stability analysis of large time-stepping methods for epitaxial growth models, *SIAM J. Numer. Anal.*, 44 (2006), pp. 1759–1779.
- [13] Z. Zhang and Q. Qiao, An adaptive time-stepping strategy for the Cahn-Hilliard equation, *Commun. Comput. Phys.*, 11 (2012), pp. 1261–1278.